


Photometric Diagram

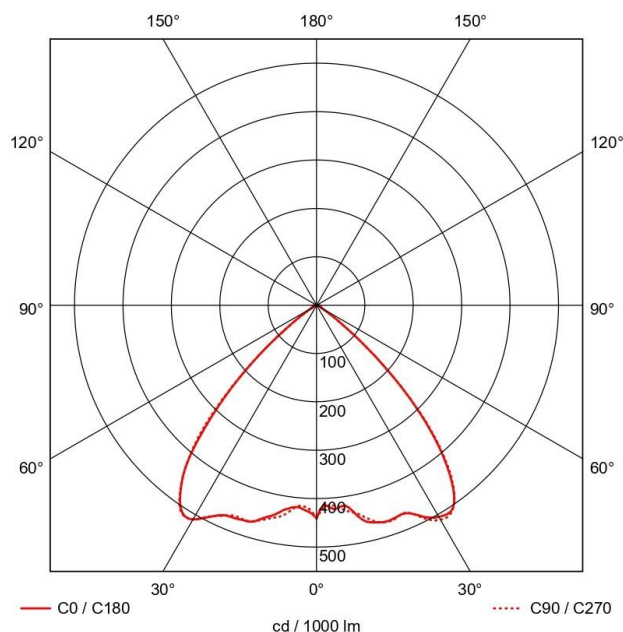

Luminaire Efficiency: 84%

Life/ Maintenance

• LED Driver Average Rated Life	100 000hrs
• LED Life	54 000hrs (L80 F10, TP 45°C)

Application

- Tunnel
- Industrial
- Conveyor
- Security

Benefits

- **5 Year warranty**
- Built-in surge Protection (optional extra 10kA/10kV available)

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Tridonic LED modules and driver
- Ambient temperature: -25... +80°C
- Borosilicate clear tempered glass or polycarbonate cover available (ordered separately)
- Designed to be retrofitted in existing B40 luminaires
- Replacement luminaire glass or polycarbonate lens available as optional extra
- Wide beam and narrow beam optics available

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
B40-RETRO-34W-LED	6280	38W	0.95	500mA	384mm	245mm	50mm	0.3kg
B40-RETRO-50W-LED	8536	53W	0.95	700mA	384mm	245mm	50mm	0.3kg