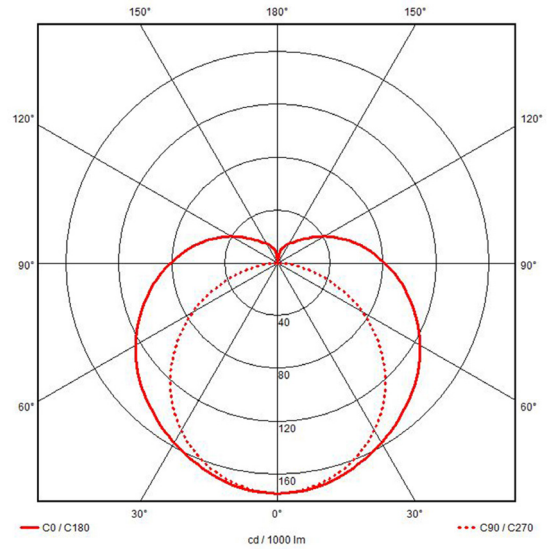


Photometric Diagram


Luminaire efficiency: 80.7%

Life/Maintenance

LED Driver Average Rated Life	100 000hrs
LED Life	> 60 000hrs (L80 F10, TP 45°C)

Applications

- Parking garages
- Industrial halls
- Cold storage facilities
- Power stations

Benefits

- 5 year warranty**
- Built-in surge protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ambient temperature: -25...+45°C
- Self-extinguishing polycarbonate body
- UV stabilised, self-extinguishing polycarbonate opal diffuser and smooth outer surface
- Anti-tamper polycarbonate snap-lock latches (stainless steel on request)
- Hinge-able gear tray
- Complete with mounting accessories
- DALI/DSI and dimmable options available
- Emergency options available
- High efficiency version

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions					Weight
					L	Lf	W	H1	H2	
C11-HO-44W-LED	7490	48.3W	0.98	325mA	1270mm	795mm	100mm	100mm	110mm	2.3kg
C11-HO-55W-LED	9070	60.4W	0.98	400mA	1270mm	795mm	100mm	100mm	110mm	2.3kg