


Photometric Diagram

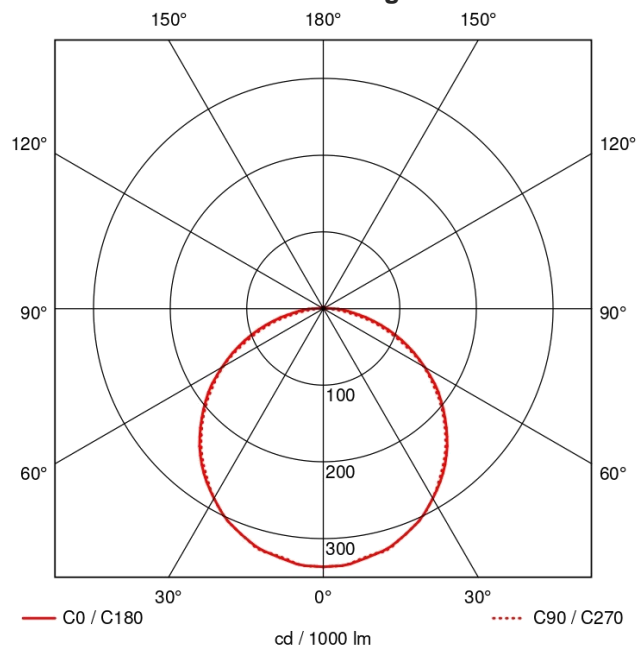

Luminaire Efficiency: 80%

Life/ Maintenance

- | | |
|---------------------------------|---------------------|
| • LED Driver Average Rated Life | 50 000hrs |
| • LED Life | 50 000hrs (L70 F10) |

Application

- | | |
|---------------|-----------------|
| • Residential | • Offices |
| • Hotels | • Retail Stores |

Benefits

- 5 Year warranty
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 3000K (4000K and 5000K on request)
- 6063T6 Grade extruded Aluminium
- Remote control gear
- Frosted low loss acrylic diffuser
- Finish – natural and black anodized, white powder coated
- 5W, 10W and 15W versions available
- Custom cut length up to 5m
- DALI and dimmable options available

Specification	Lumen per m	System Power	Power Factor	Dimensions			Weight
				W1	W2	H	
CLOSED-CHANNEL - 5W	850	6W	0.96	38mm	34.6mm	35.7mm	1.2kg p/m
CLOSED-CHANNEL - 10W	1700	12W	0.96	38mm	34.6mm	35.7mm	1.2kg p/m
CLOSED-CHANNEL - 15W	2020	17W	0.96	38mm	34.6mm	35.7mm	1.2kg p/m