




Square Diffuser




Curved Diffuser



Open Diffuser



Photometric Diagram

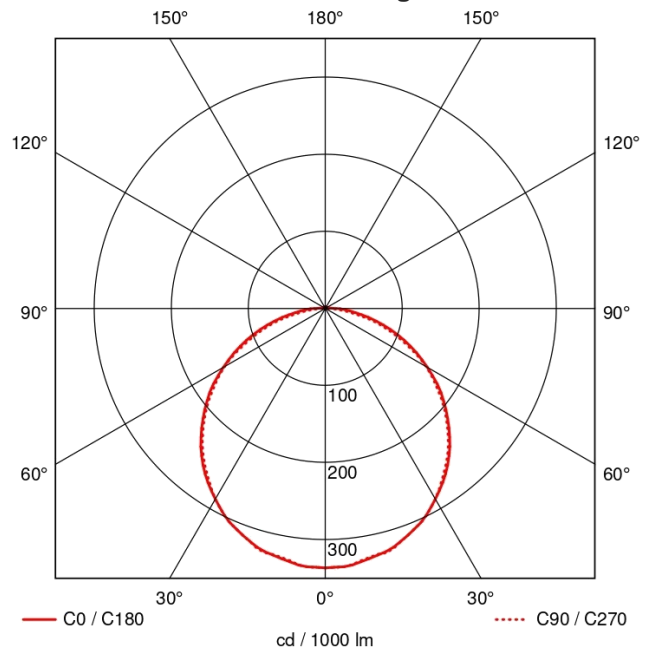

**Luminaire Efficiency: 80%**

### Life/ Maintenance

- |                                 |                     |
|---------------------------------|---------------------|
| • LED Driver Average Rated Life | 50 000hrs           |
| • LED Life                      | 50 000hrs (L70 F10) |

### Application

- |         |                    |
|---------|--------------------|
| • Coves | • Display Cabinets |
|---------|--------------------|

### Benefits

- 5 Year warranty
- Built-in surge Protection

### Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 3000K (4000K and 5000K on request)
- 6063T6 Grade extruded Aluminium
- Remote control gear
- Clear and Opal Diffusers available
- Finish – natural and black anodized
- 10W and 15W versions available
- Custom cut length up to 5m
- Fully dimmable
- Fixing via clips

Specification	Lumen per m	System Power	Power Factor	Dimensions				Weight
				W	H1	H2	H3	
HAWK - 5W	850	6W	0.96	23mm	21mm	17mm	11mm	0.2kg p/m
HAWK - 10W	1700	12W	0.96	23mm	21mm	17mm	11mm	0.2kg p/m
HAWK - 15W	2020	17W	0.96	23mm	21mm	17mm	11mm	0.2kg p/m