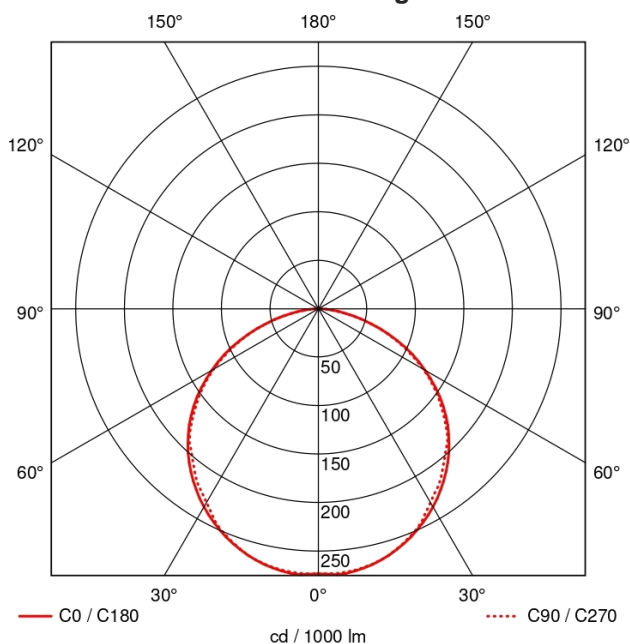


Photometric Diagram


**Luminaire Efficiency: 80.22%**

### Life/ Maintenance

• LED Driver Average Rated Life	100 000hrs
• LED Life	72 000hrs (L80 F10, TP 65°C)

### Application

- Cove Lighting
- Storage Rooms
- Retail Lighting
- Passage Lighting

### Benefits

- **5 Year warranty**
- Built-in surge Protection

### Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ripple current < 3%
- All fixtures component parts are replaceable
- Ambient temperature: -25...+45°C
- Semi-transparent PMMA diffuser
- Polycarbonate end-caps
- DALI/DSI and dimmable options available
- Emergency options available
- High efficiency version

Specification	Lumen @ 65°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
LP1-17W-LED-HE	3433	19.1W	0.98	200mA	1180mm	80mm	73mm	2kg
LP1-24W-LED-HE	4561	26.7W	0.98	275mA	1180mm	80mm	73mm	2kg
LP1-31W-LED-HE	5717	34.5W	0.98	350mA	1180mm	80mm	73mm	2kg
LP1-36W-LED-HE	6559	39.7W	0.98	400mA	1180mm	80mm	73mm	2kg