


Photometric Diagram

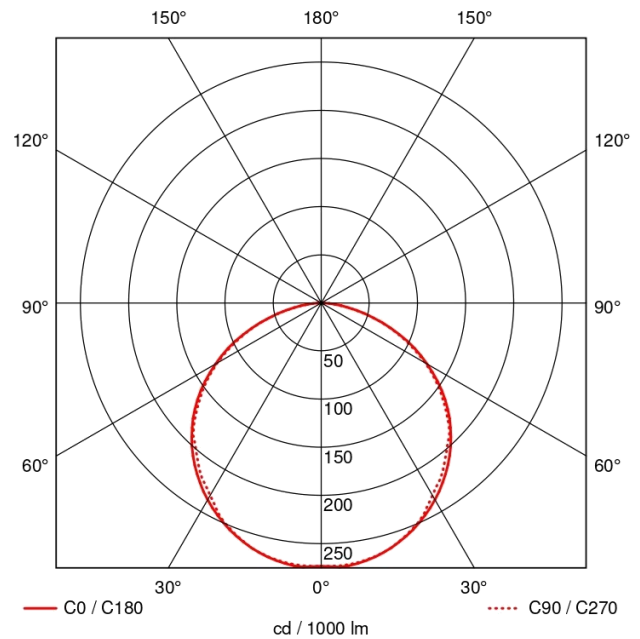

Luminaire Efficiency: 80.22%

Life/ Maintenance

• LED Driver Average Rated Life	100 000hrs
• LED Life	72 000hrs (L80 F10, TP 65°C)

Application

- Class Rooms
- Storage Rooms
- Retail Lighting
- Passage Lighting

Benefits

- **5 Year warranty**
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ripple current < 3%
- All fixtures component parts are replaceable
- Ambient temperature: -25...+45°C
- Semi-transparent PMMA diffuser
- Polycarbonate end-caps
- DALI/DSI and dimmable options available
- Emergency options available
- High output version

Specification	Lumen @ 65°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
LP1-43W-LED-HO	7986	47.8W	0.98	325mA	1180mm	80mm	73mm	2kg
LP1-54W-LED-HO	9838	59.5W	0.98	400mA	1180mm	80mm	73mm	2kg