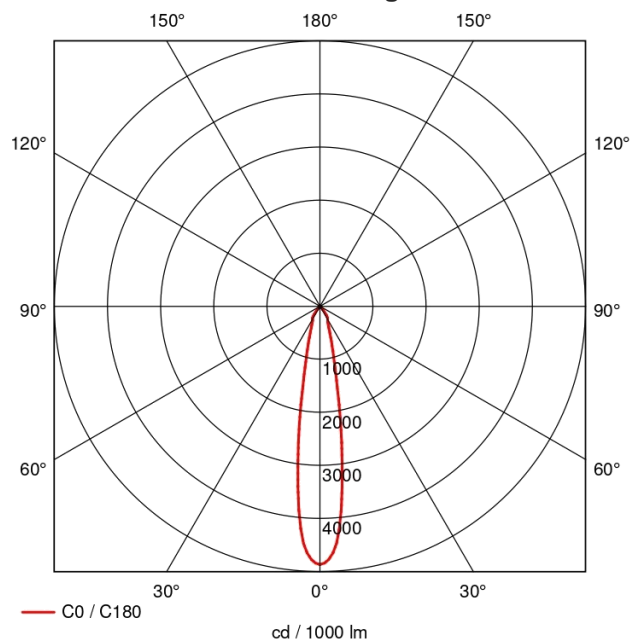


Photometric Diagram


**Luminaire Efficiency: 97.1%**

### Life/ Maintenance

• LED Driver Average Rated Life	50 000hrs
• LED Life	50 000hrs (L80 F10, TP 45°C)

### Application

• Retail Stores	• Hotels
• Shopping Malls	• Interior Architectural Lightig

### Benefits

- **5 Year warranty**
- Built-in surge Protection

### Product Features and Accessories

- High colour rendering index CRI > 80 (CRI >90 available on request)
- Colour temperature 4000K (3000K on request)
- Small colour tolerance - MacAdam 3
- Special colours on request
- Powder coated aluminium body
- Available in wide and narrow beam angle (34° and 19°)
- Higher wattage and output available on request

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					D	L	M	
M16-12W	2115	14.2W	0.98	350mA	100mm	100mm	214x56mm	1.1kg
M16-17W	2950	20.9W	0.98	500mA	100mm	100mm	214x56mm	1.1kg
M16-25W	4010	28.6W	0.98	700mA	100mm	100mm	214x56mm	1.1kg