


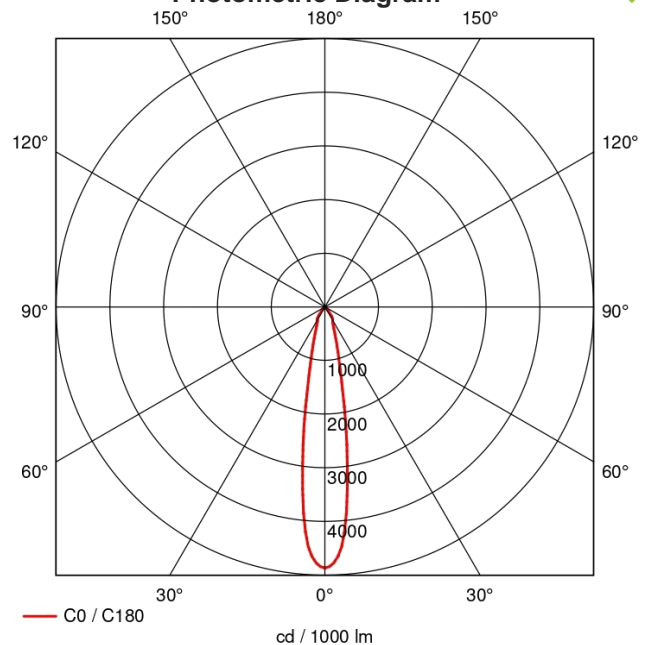

Photometric Diagram


Luminaire Efficiency: 97.1%

Life/ Maintenance

- | | |
|---------------------------------|------------------------------|
| • LED Driver Average Rated Life | 50 000hrs |
| • LED Life | 50 000hrs (L80 F10, TP 45°C) |

Application

- | | |
|------------------|-----------------------------------|
| • Retail Stores | • Hotels |
| • Shopping Malls | • Interior Architectural Lighting |

Benefits

- 5 Year warranty
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80 (CRI >90 available on request)
- Colour temperature 4000K (3000K on request)
- Small colour tolerance - MacAdam 3
- Special colours on request
- Powder coated aluminium body
- Available in wide and narrow beam angle (34° and 19°)
- Higher wattage and output available on request

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions		Weight
					L	D	
M20-12W	2115	14.2W	0.98	350mA	220mm	127mm	1.5kg
M20-17W	2950	20.9W	0.98	500mA	220mm	127mm	1.5kg
M20-25W	4010	28.6W	0.98	700mA	220mm	127mm	1.5kg