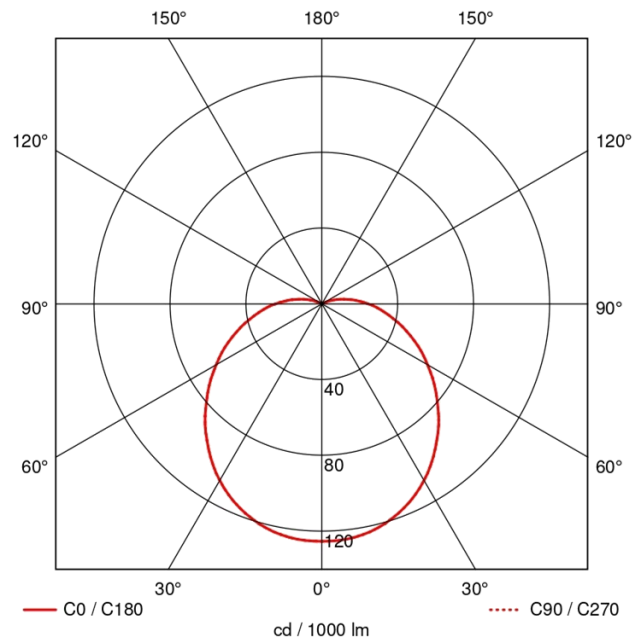


Photometric Diagram


Luminaire Efficiency: 46.1%

Life/ Maintenance

• LED Driver Average Rated Life	50 000hrs
• LED Life	50 000hrs (L80 F10, TP 45°C)

Application

- Residential Areas
- Architectural Lighting
- Building Perimeter
- Shopping Malls

Benefits

- **5 Year warranty**

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K on request)
- Vossloh Schwabe main voltage (220-240V) LED module
- Ambient temperature: -25...+45°C
- LM6 marine grade aluminium
- Chemically treated and epoxy powder coated
- Architectural colours available
- Opal polycarbonate diffuser
- 316 stainless steel screws with heli-coils
- Emergency options available

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
MILANO-21W-LED	2875	23.4W	0.93	400mA	270mm	270mm	93mm	2.5kg