


Photometric Diagram

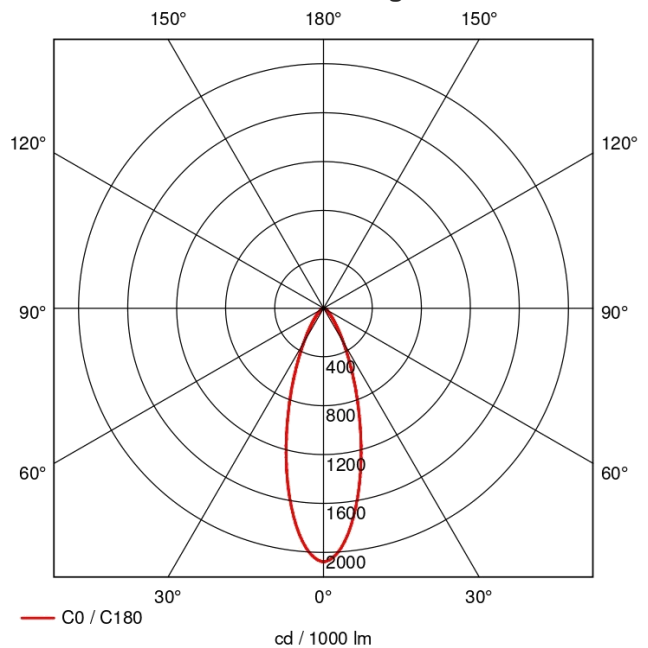

Luminaire Efficiency: 100%

## Life/ Maintenance

- LED Life 25 000hrs

## Application

- Residential
- Hotels
- Retail Stores
- Interior Architectural Lighting

## Product Features and Accessories

- High colour rendering index CRI > 90
- Colour temperature 4000K or 3000K
- Small colour tolerance - MacAdam 5
- Special colours available on request
- Powder coated aluminium body
- 34° beam angle
- Fully dimmable

## Benefits

- 3 Year warranty

Specification	Lumen @ 45°C	System Power	Power Factor	Dimensions			Weight
				D	L	M	
MS-GU10-7.5W	650	8W	0.7	63mm	122mm	57mm	0.4kg