

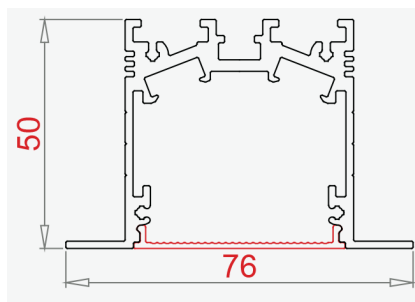


# LASCON® ORYX-HP-RECESSED LED

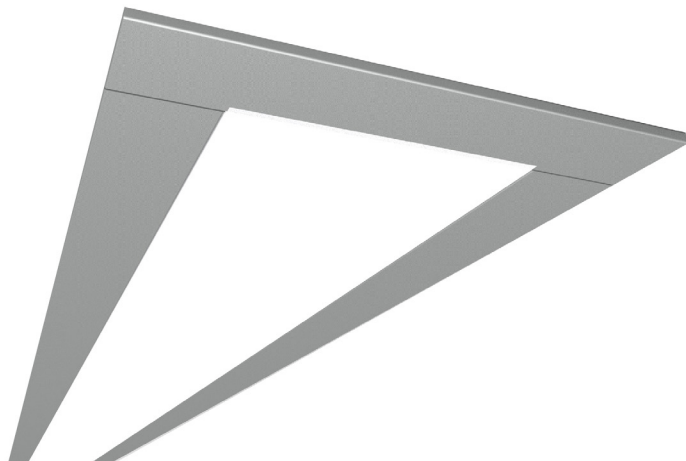

Photometric Diagram

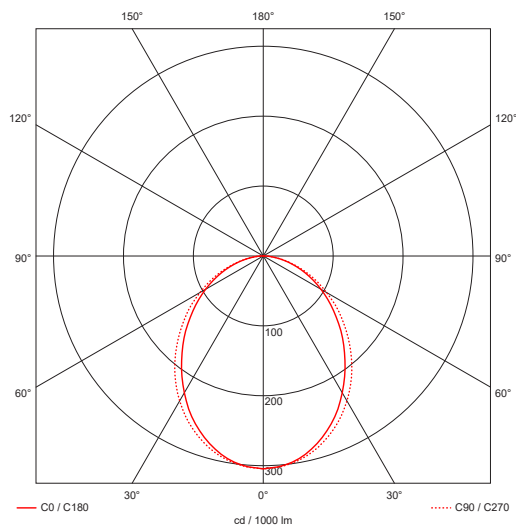

## Life/Maintenance

LED Driver Average Rated Life	50 000hrs
LED Life	50 000hrs (L70 F10)

## Product Features and Accessories

- 6063T6 Grade extruded and anodised aluminium profile with high transmission opal white acrylic diffuser.

## Applications

- Hotels
- Offices
- Commercial
- Residential

## Benefits

- Ease of installation
- Plug and Play system. Contractors do not need to open any part of the fitting to complete installation.

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions			Weight
					Cut out	W	H	
ORYX-R-HP-600W	2454	14.7W	0.96	400mA	55mm	76mm	50mm	0.9kg
ORYX-R-HP-1200W	4909	29.4W	0.96	400mA	55mm	76mm	50mm	1.8kg
ORYX-R-HP-1800W	7363	44.2W	0.96	400mA	55mm	76mm	50mm	2.7kg
ORYX-R-HP-2400W	9818	58.9W	0.96	400mA	55mm	76mm	50mm	3.6kg