



LASCON® ORYX-HP-SURFACE LED

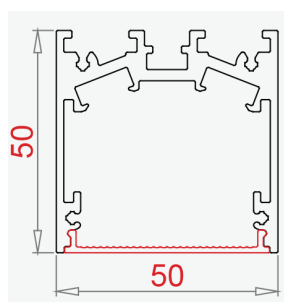

Photometric Diagram

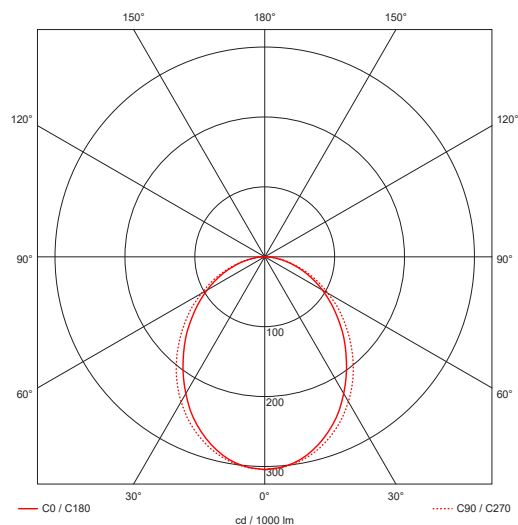

Life/Maintenance

LED Driver Average Rated Life	50 000hrs
LED Life	50 000hrs (L70 F10)

Product Features and Accessories

- 6063T6 Grade extruded and anodised aluminium profile with high transmission opal white acrylic diffuser.

Applications

- Hotels
- Commercial
- Offices
- Residential

Benefits

- Ease of installation
- Plug and Play system. Contractors do not need to open any part of the fitting to complete installation.

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions		Weight
					W	H	
ORYX-HP-600W	2454	14.7W	0.96	400mA	50mm	50mm	0.9kg
ORYX-HP-1200W	4909	29.4W	0.96	400mA	50mm	50mm	1.8kg
ORYX-HP-1800W	7363	44.2W	0.96	400mA	50mm	50mm	2.7kg
ORYX-HP-2400W	9818	58.9W	0.96	400mA	50mm	50mm	3.6kg