




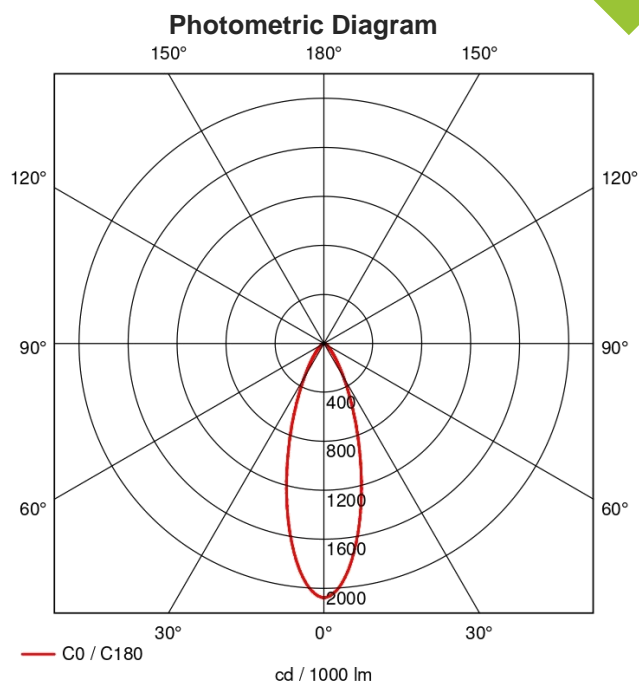

PG SOLID TUBE



PG-ACRYLIC



**Luminaire Efficiency: 100%**

#### Life/ Maintenance

- LED Life 25 000hrs

#### Application

- Residential
- Hotels
- Retail
- Interior Architectural Lighting

#### Benefits

- 3 Year warranty

#### Product Features and Accessories

- High colour rendering index CRI > 90
- Colour temperature 4000K or 3000K
- Small colour tolerance – MacAdam 5
- Special colours on request
- Powder coated aluminium body
- 34° beam angle
- Fully dimmable

Specification	Lumen @ 45°C	System Power	Power Factor	Dimensions		Weight
				D	H	
PG-GU10-7.5W	650	8W	0.7	90mm	210mm	0.6kg
PG-A-GU10-7.5W	650	8W	0.7	90mm	310mm	1.5kg