


Photometric Diagram

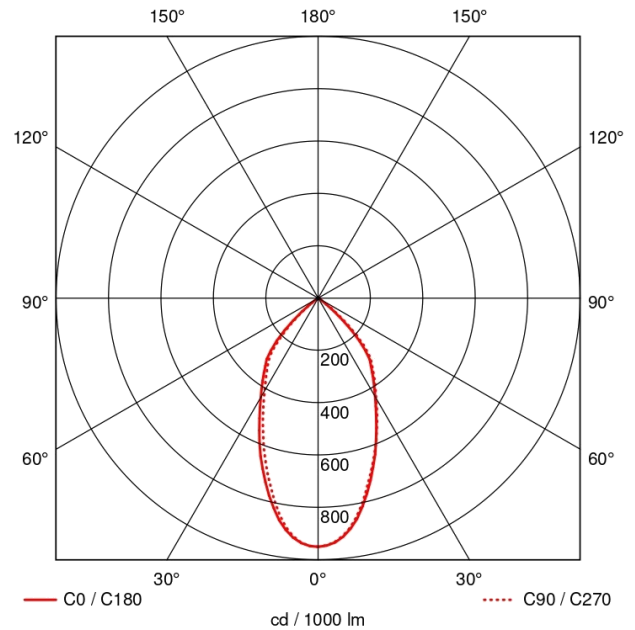

Luminaire Efficiency: 94.3%

Life/ Maintenance

• LED Average Rated Life	50 000hrs
• LED Life	55 000hrs (L80 F10, TP 45°C)

Application

• Retail	• Hotels
• Shopping Malls	• Interior Architectural Lighting

Benefits

- **5 Year warranty**
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80 (CRI > 90 available on request)
- Colour temperature 4000K (3000K on request)
- Small colour tolerance – MacAdam 3
- Special colours on request
- Powder coated aluminium body
- Available in wide and narrow beam (54° and 34°)
- High wattage and output available on request

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions		Weight
					D	H	
PS-RG-12W	2110	14.2W	0.98	350mA	458mm	265mm	2.2kg
PS-RG-17W	2940	20.9W	0.98	500mA	458mm	265mm	2.2kg
PS-RG-25W	4980	28.6W	0.98	800mA	458mm	265mm	2.2kg