


Photometric Diagram

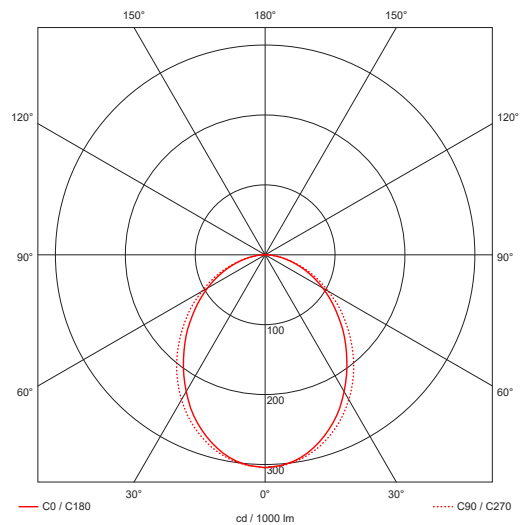

Life/Maintenance

LED Driver Average Rated Life	50 000hrs
LED Life	50 000hrs (L70 F10)

Product Features and Accessories

- 6063T6 Grade extruded and anodised aluminium profile with high transmission opal white acrylic diffuser.

Applications

- Hotels
- Offices
- Commercial
- Residential

Benefits

- Ease of installation
- Plug and Play system. Contractors do not need to open any part of the fitting to complete installation.

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions		Weight
					W	H	
PUMA-600	2454	14.7W	0.96	300mA	50mm	80mm	1.1kg
PUMA-1200	4909	29.4W	0.96	300mA	50mm	80mm	2.2kg
PUMA-1800	7363	44.2W	0.96	300mA	50mm	80mm	3.3kg
PUMA-2400	9818	58.9W	0.96	300mA	50mm	80mm	4.4kg