





DOME

EYELID

GRID



Photometric Diagram

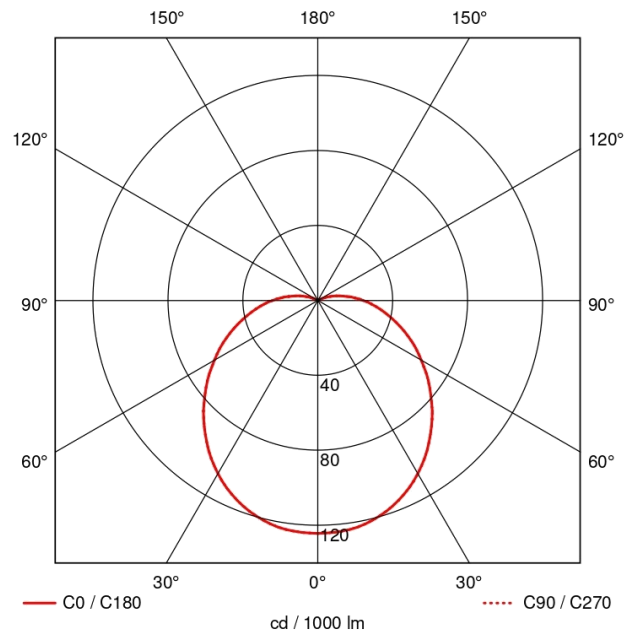

**Luminaire Efficiency: 46.3%**

### Life/ Maintenance

• LED Driver Average Rated Life	50 000hrs
• LED Life	50 000hrs (L80 F10, TP 45°C)

### Application

- Residential
- Architectural
- Building Perimeter
- Shopping Malls

### Benefits

- 5 Year warranty

### Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K on request)
- Vossloh Schwabe main voltage (220-240V) LED module
- Ambient temperature: -25...+45°C
- LM6 marine grade aluminium body and accessories
- Chemically treated and epoxy powder coated
- Architectural colours available
- Opal polycarbonate diffuser
- 316 stainless steel screws with heli-coils
- Emergency options available

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions		Weight
					D	H	
RIMINI-DOME-21W-LED	2875	23.4W	0.93	600mA	273mm	125mm	1.9kg
RIMINI-EYELID-21W-LED	2875	23.4W	0.93	600mA	273mm	125mm	1.9kg
RIMINI-GRID-21W-LED	2875	23.4W	0.93	600mA	273mm	125mm	1.9kg