


LASCON® SDL 150 LED



Photometric Diagram

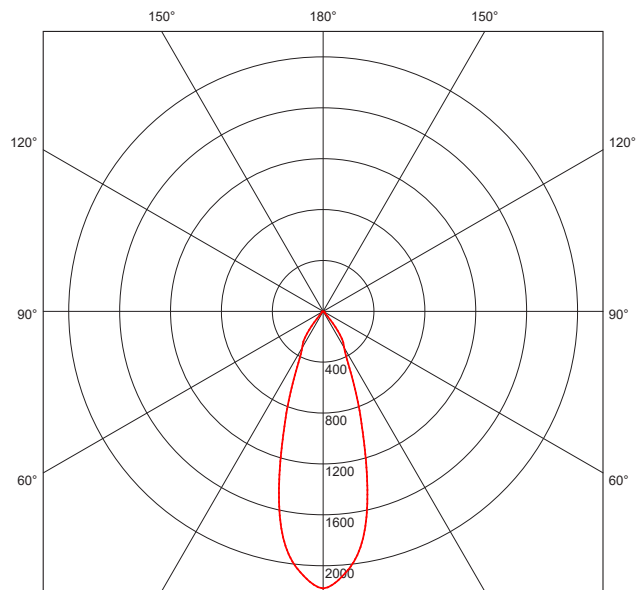

Luminaire efficiency: 96%

Colours available



Matt black



Matt white

Life/Maintenance

LED Driver Average Rated Life	50 000hrs
LED Life	50 000hrs (L80 F10, TP 45 °C)

Applications

- Residential lighting
- Passages and walkways
- Shopping malls

Benefits

- 5 year warranty
- Built-in surge protection

Product Features and Accessories

- High colour rendering CRI > 80 (CRI > 90 available on request)
- Colour temperature 4000K (3000K on request)
- Direct replacement for HID Metal Halide 20W to 35W
- Small colour tolerance - MacAdam 3
- Chemically treated and epoxy powder coated
- 5 year warranty
- IP54
- Available in a wide and narrow beam (34° and 19°)

Specification	Lumen @ 45°C	System Power	Power Factor	Current	Dimensions		Weight
					L	D	
SDL-150-LED-12W	2115	14.2W	0.98	350mA	150mm	100mm	1kg
SDL-150-LED-17W	2950	20.9W	0.98	500mA	150mm	100mm	1kg