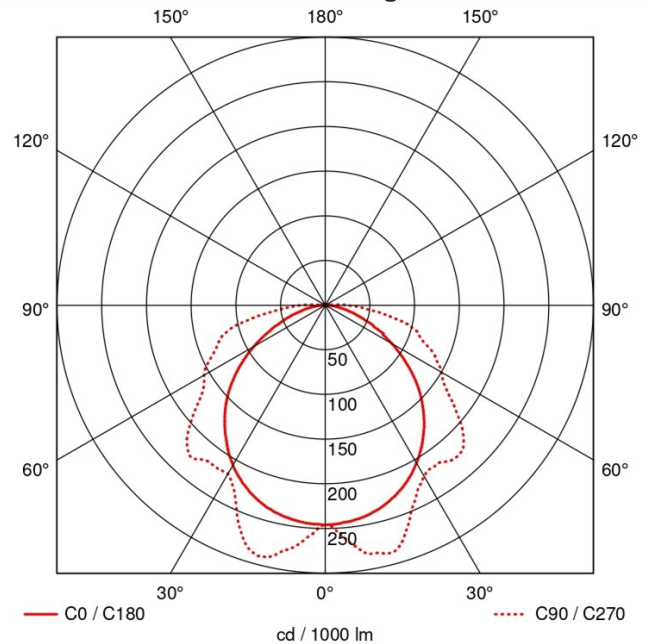


Photometric Diagram


Luminaire Efficiency: 88.9%
Life/ Maintenance

• LED Driver Average Rated Life	100 000hrs
• LED Life	72 000hrs (L80 F10, TP 65°C)

Application

- | | |
|-------------------------|-----------------------|
| • Prison Cells | • Holding Cells |
| • Psychiatric Hospitals | • High Security Areas |

Benefits

- **5 Year warranty**
- Built-in surge Protection

Product Features and Accessories

- High colour rendering index CRI > 80
- Colour temperature 4000K (3000K and 5000K on request)
- Small colour tolerance - MacAdam 3
- Tridonic LED module and driver
- Ripple current < 3%
- All fixtures component parts are replaceable
- Ambient temperature: -25...+45°C
- "Snake eye" tamper proof screws hold the diffuser in place and are removable with a special tool
- Optic hides the LEDs
- Approved luminaire by the department of correctional services
- One-piece injection moulded self-extinguishing UV stabilized polycarbonate diffuser
- Available with night light
- DALI/DSI and dimmable options available
- Emergency options available

Specification	Lumen @ 65°C	System Power	Power Factor	Current	Dimensions			Weight
					L	W	H	
TP-26W-LED	5180	28.5W	0.98	150mA	1299mm	210mm	120mm	8kg
TP-36W-LED	6865	38.3W	0.98	200mA	1299mm	210mm	120mm	8kg