
## TR

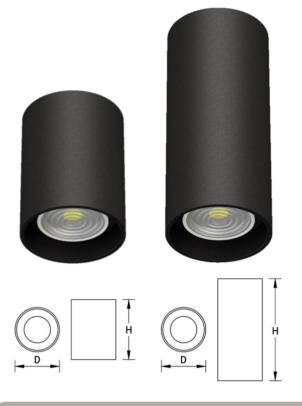


# Life/ Maintenance

25 000hrs

### Application

**Benefits** 

- **Residential Lighting** • Hotels • • Retail
  - Interior Architectural Lighting



•••

#### 120 60° 60° 160 2000 0° 30° 30° - C0 / C180 cd / 1000 lm

### Luminaire Efficiency: 100%

### **Product Features and Accessories**

- High colour rendering index CRI > 90 •
- Colour temperature 4000K or 3000K •
- Small colour tolerance - MacAdam 5
- ٠ Special colours on request
- Powder coated aluminium body
- . 34° beam angle

120°

90°

Fully dimmable •

### 3 Year warranty

LED Life

•

Specification	Lumen @ 45°C	System Power	Power Factor	Dimensions		Weight
				D	н	Weight
TR-100-GU10-7.5W	650	8W	0.7	74mm	100mm	0.3kg
TR-200-GU10-7.5W	650	8W	0.7	74mm	200mm	0.4kg







Please note: Subject to any applicable laws from time to time; (1) All the product images shown in this catalogue are for marketing purposes and may differ from the actual product. Dimensions are generally shown in mm. (2) All factual informat this catalogue was correct at the time of going to print and is subject to change without prior notice. Minimum quantity orders may apply. Errors and Omissions Excepted: Eagle Lighting (Phy) Lid and its Marketing Agency do not accept responsi or liability for any incorrect listing of any marchandse or information. Eagle Lighting Terms & Conditions of Sale which can be found at www.eagle/lighting.co.zand the Disclaimer which is set out at the end of this catalogue apply.