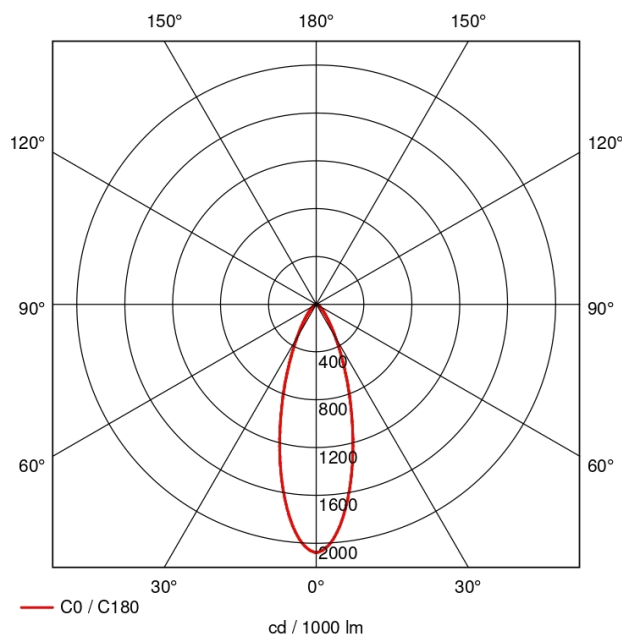


Photometric Diagram


Luminaire Efficiency: 100%
Life/ Maintenance

- LED Life 25 000hrs

Application

- Residential Lighting
- Hotels
- Retail
- Interior Architectural Lighting

Product Features and Accessories

- High colour rendering index CRI > 90
- Colour temperature 4000K or 3000K
- Small colour tolerance – MacAdam 5
- Special colours on request
- Powder coated aluminium body
- 34° beam angle
- Fully dimmable

Benefits

- 3 Year warranty
- Built-in surge protection

| Specification | Lumen @ 45°C | System Power | Power Factor | Dimensions | | Weight |
|------------------|--------------|--------------|--------------|------------|-------|--------|
| | | | | W | H | |
| TS-100-GU10-7.5W | 650 | 8W | 0.7 | 76mm | 100mm | 0.3kg |
| TS-200-GU10-7.5W | 650 | 8W | 0.7 | 76mm | 200mm | 0.4kg |