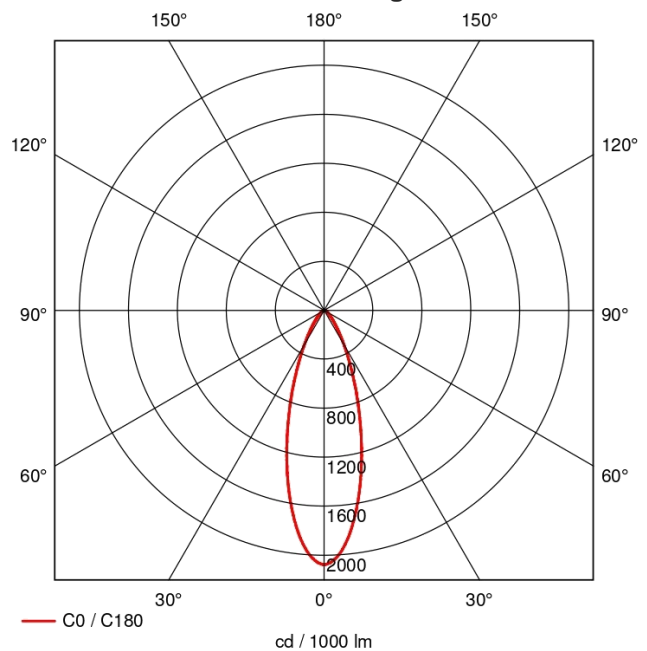
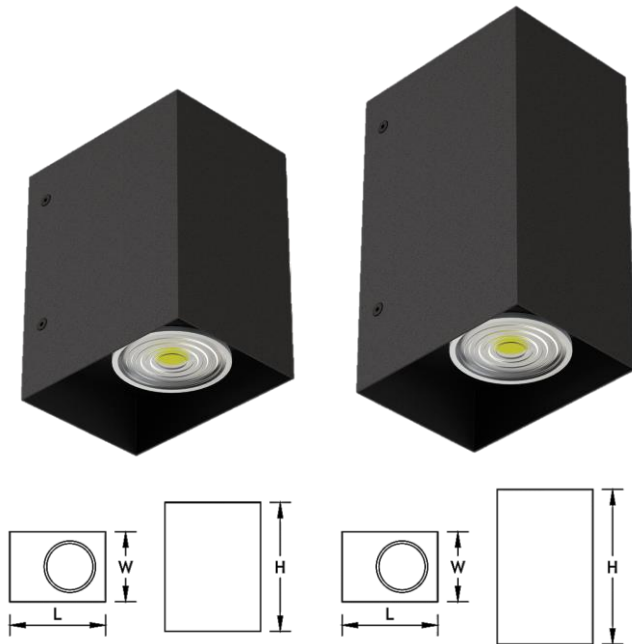


Photometric Diagram


Luminaire Efficiency: 100%

Life/ Maintenance

- LED Life 25 000hrs

Application

- Residential
- Hotels
- Retail
- Interior Architectural Lighting

Product Features and Accessories

- High colour rendering index CRI > 90
- Colour temperature 4000K or 3000K
- Small colour tolerance – MacAdam 5
- Special colours on request
- Powder coated aluminium body
- 34° beam angle
- Fully dimmable

Benefits

- 3 Year warranty

Specification	Lumen @ 45°C	System Power	Power Factor	Dimensions			Weight
				L	W	H	
WS-100-UD-GU10-7.5W	650	8W	0.7	93mm	68mm	100mm	03kg
WS-150-UD-GU10-7.5W	650	8W	0.7	93mm	68mm	150mm	0.4kg